

Description:

GEOPAVE® SNAP delineators are inserted into the GEOPAVE® unit's square or rectangular cells to mark parking spaces, drive lanes, center lines or other delineation. The placement density of GEOPAVE® SNAP delineators shall be as required to meet visual and local agency requirements.

GEOPAVE® SNAP delineators are placed after installation of the GEOPAVE® units and before installation of the infill material. If SNAP delineators are desired after infill placement, infill may be removed with a vacuum to allow insertion of delineators at select locations.

GEOPAVE SNAP Delineator	Specifications
Material	UV-Resistant Polymer
Color	Yellow or Custom-Ordered Colors
Chemical Resistance	Superior
Weight per Unit (nominal)	0.154 lbs (0.070 kg)
Nominal Dimensions (width x length x height)	3.0 in x 3.0 in x 2.0 in (76 mm x 76 mm x 50 mm)
Surface	Diamond plate, non-skid pattern
Connection	4 locking tabs snap in cell walls



Figure 1. GEOPAVE SNAP Delineator

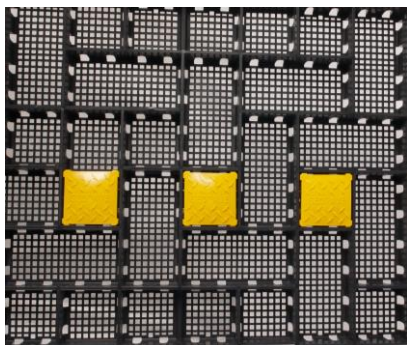


Figure 2. GEOPAVE SNAP Delineators installed in GEOPAVE Unit



Figure 3. GEOPAVE SNAP Delineators installed for parking lanes